

Hydrocell XL*

High performance, cross linked, closed cell, non-absorbent, polyethylene joint filler

Uses

Hydrocell XL is a cross linked, non absorbent, semi-rigid, cellular polyethylene joint filler used for forming expansion joints in concrete, brickwork and blockwork.

The product provides excellent support to sealants subject to hydrostatic pressure and is particularly recommended for water retaining or water excluding structures.

Hydrocell XL is high-performance replacement for traditional sponge rubber (ASTM D1752, type 1) and cork (ASTM D1752, type 2) joint fillers.

Advantages

- Cross linked to resist lateral and hydrostatic pressure
- High density support of sealant to prevent adhesion failure
- Non absorbent closed cell structure
- High compression recovery
- Non - extruding
- Low load transfer to joint edges
- Non tainting
- Chemically resistant
- Natural bond breaker
- Rot proof



Standards compliance


Water Authorities Association, Civil Engineering Spec. for the Water Industry, 4th Edition Clause 2.124. UK WFBS listed product – suitable for use in contact with potable water. Listing number 9308528. DTp Specification for Highway Works, Dec 1991, Series 1000 clause 1015. Exceeds the performance requirements of ASTM D1752-84 and AASHTO M153-92 for recovery and extrusion.

Specification

The joint filler shall be cross linked, non absorbent, semi-rigid, cellular polyethylene with a nominal density of 60 kg/m³. It shall have a recovery of 98% after 50% compression and a compressive strength of 0.15 N/mm² when tested in accordance with ASTM D3575. It shall have a water absorption of less than 0.05% by volume when tested in accordance with ASTM D3575 and be resistant to weathering and chemical attack. The joint filler shall have Water Byelaws Scheme approval for use in contact with potable water.

Design criteria

Typical detail of a wall expansion joint occurring in a closed reservoir.

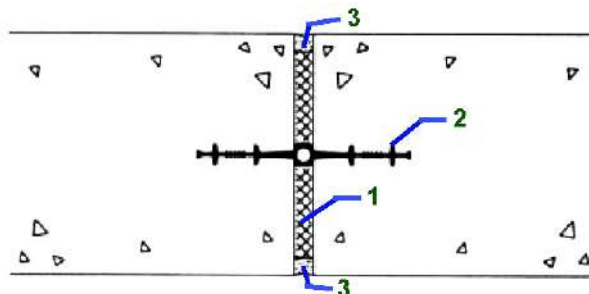

1. Hydrocell XL
2. Supercast Hydrofoil
3. Thioflex 600 or Nitoseal MS600

Properties

The value given below are typical figures achieved in laboratory tests. Actual values obtained on-site may show minor variations from those quoted.


Compressive strength (ASTM D3575)	: 0.15 N/mm ²
Extrusion	: 0.3 mm (DTp clause 1015) ⁽¹⁾
Recovery (ASTM D3575)	: 98% after 50% compression
Water absorption (ASTM D3575)	: Less than 0.05% by volume
Weathering test (DTp clause 1015)	: No disintegration
Drinking water approval (BS 6920)	: WFBS, listing number 9308528

Note (1): These test methods are equivalent to those specified in ASTM D1752.

Compression loading

The load compression curve gives typical compression values achieved in accordance to ASTM D3575.

Typical load/compression curve

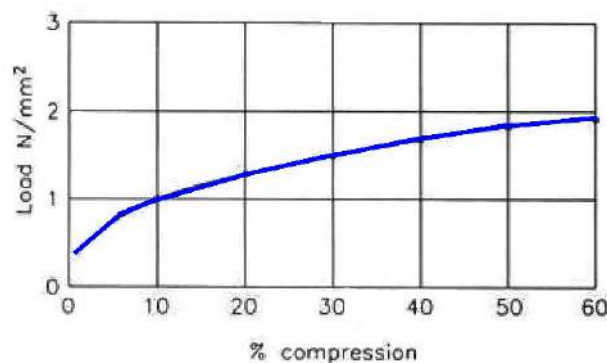

Hydrocell XL*

Chemical resistance

Excellent resistance to acids, alkalis, oxidising agents and biological degradation.

Instructions for use

Joint sealing slots

When forming expansion joints with Hydrocell XL in in-situ concrete, joint sealing slots can be readily formed in the following manner.

Before installing, simply cut off a strip to the required depth. Pin the strip back on using two-inch nails at approximately 100 mm intervals. Then install the filler flush with the finished surface.

Prior to sealing the top strip can then be pulled easily from the joint to provide an uncontaminated sealing slot ready for preparation and sealing. As elastomeric sealants will not bond to Hydrocell XL the additional need for bond breaker strips is eliminated.

Limitations

Hydrocell XL should not be used when the operational temperature is continuously outside the range of -70°C to 100°C.

Estimating

Supply

Hydrocell XL	: 900×1800 mm sheets
Thickness	: 10 mm, 15 mm, 20 mm & 25 mm

Storage

Hydrocell XL should be stored in a clean area and should not be left exposed to direct sunlight for long periods, especially in hot climates.

Precautions

Health and safety

There is no health hazards associated with Hydrocell XL in normal use.

The Right Chemistry for Construction

Fosroc is one of the world's major manufacturers of advanced technology chemical based products for the construction and refurbishment industries. It operates internationally through a network of operating companies, licensees, distributors and agents.

Having over 70 years experience and using global resources for research and technical development, Fosroc has built a substantial worldwide reputation in manufacturing the most comprehensive range of high performance construction chemicals:

- Concrete admixtures
- Surface treatments
- Grouts and anchors
- Concrete repair
- Industrial flooring
- Protective coatings
- Joint sealants
- Waterproofing
- Adhesives
- F.R.P Structural Strengthening
- Specific building products



Important note

Fosroc products are guaranteed against defective materials and manufacture and are sold subject to its standard Conditions for the Supply of Goods and Service.

Fars Iran Limited

No. 9, 25 th St., Khaled Eslamboli
(Vozara) Ave., Tehran 15139 - Iran

telephone:
+98 (21) 88719021

fax:
+98 (21) 88721664

email:
iran@fosroc.com

www.fosroc.com

